




# Interface® | Infuse


## SPECIFICATION


<b>Product definition</b>	Tufted Patterned Structured Loop Tile	<b>Style number</b>	<b>33345</b>
<b>Pile Material</b>	100% BCF Solution Dyed Nylon contains pre-consumer recycled content	<b>Wear Classification</b>	EN 1307 33 Heavy Contract
<b>Pile Yarn Weight</b>	587g/m <sup>2</sup> ± 10%	<b>Radiant panel</b>	(EN ISO 9239/1) Euroclass Cfl s1 (EN ISO 13501)
<b>Effective pile yarn weight</b>	425g/m <sup>2</sup> ± 10%	<b>Hot Metal Nut Castor Chair Rating</b>	≥ 2,4 (EN 985)
<b>Total Weight</b>	4482 g/m <sup>2</sup> ± 5%	<b>Dimensional Stability</b>	≤ 0,2% (ISO 2551 / EN 986)
<b>Pile Height</b>	3.4 mm ± 0.5 mm	<b>Vertical Electrical Resistance</b>	5 x 10 <sup>5</sup> Ω >< 1 x 10 <sup>9</sup> Ω Computerguard (ISO 10965)
<b>Total Thickness</b>	6.8 mm ± 0.5 mm	<b>Colour Fastness - Light</b>	≥ 7 (ISO 105/B02)
<b>Gauge/Ends per 10cm</b>	1/10 - 39.4	<b>Tiles per Box</b>	16 - 4m <sup>2</sup> (50 x 50 cm ± 0,2%)
<b>Tufts per m2</b>	173,360 ± 7.5%		
<b>Backing Type</b>	Graphlex®		

  
 06  
 0336-CPD-8538


  
 Cfl-s1

  
 DS

  
 ≤10<sup>9</sup>Ω

  
 ≤10<sup>9</sup>Ω

EN 1307

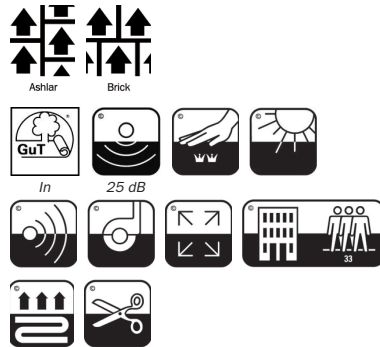

**Mission Zero:**  
 our promise to eliminate  
 any negative impact our company  
 may have on the environment  
 by the year 2020.

[www.interface.com](http://www.interface.com)

Interface Europe Ltd reserve the right to change or modify specifications