

Interface®


Touch & Tones 101

Product definition	Tufted Plain Textured Loop Tile						
Pile Material	100% Nylon						
Pile Yarn Weight	700 g/m ² ± 5%						
Total Weight	4364 g/m ² ± 5%						
Pile Height	3.3 ± 0.5 mm						
Total Thickness	6.8 ± 0.5 mm						
Gauge/Ends per 10cm	1/10 - 39.4						
Tufts per m2	102,440 ± 5%						
Backing Type	Graphlex®						
Wear Classification	EN 1307 33 Heavy Contract						
Radiant panel	(EN ISO 9239/1) Euroclass CfI S1 (EN ISO 13501)						
Dimensional Stability	≤ 0,2% (ISO 2551 / EN 986)						
Impact Sound Insulation (ΔLw)	23 (EN ISO 10140-3)						
Rating of Sound Absorption	α _w 0.15 (EN ISO 11654)						
Sound Absorption	125Hz	250Hz	500Hz	1000Hz	2000Hz	4000Hz	(EN ISO 354)
	0.03	0.03	0.07	0.18	0.29	0.37	α _s
Style number	4174	5 - 20 Tiles per Box (50 cm x 50 cm ± 0.20%)					

EN 14041



DOP: 1037/121925
textile floor covering
EN 1307

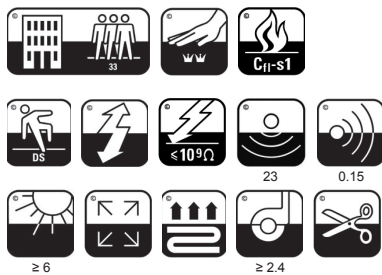

BD6DD529
www.pro-tilt.info



install with TacTiles®

Interface Europe Ltd reserve the right to change or modify specifications

www.interface.com



Mission Zero:
our promise to eliminate any negative impact our company may have on the environment by the year 2020.