


Interface®


Touch & Tones 102

Product definition	Tufted Textured Loop Tile						
Pile Material	100% Nylon						
Pile Yarn Weight	925 g/m ² ± 5%						
Total Weight	4730g/m ² ± 5%						
Pile Height	4,9 ± 0,5 mm						
Total Thickness	8,5 ± 0,5 mm						
Gauge/Ends per 10cm	1/10 - 39.4						
Tufts per m2	110.320 ± 5%						
Backing Type	Graphlex®						
Wear Classification	EN 1307 33 Heavy Contract						
Radiant panel	(EN ISO 9239/1) Euroclass Cfl s1 (EN ISO 13501)						
Dimensional Stability	≤ 0,2% (ISO 2551 / EN 986)						
Impact Sound Insulation (ΔLw)	25 dB (EN ISO 10140-3)						
Rating of Sound Absorption	α _w 0.20 (EN ISO 11654)						
Sound Absorption	125Hz	250Hz	500Hz	1000Hz	2000Hz	4000Hz	(EN ISO 354)
	0.01	0.05	0.10	0.23	0.33	0.44	α _s
Style number	4175	4 m ² - 16 Tiles per Box (50 x 50 cm ± 0.20%)					

EN 14041



DOP: 1037/121926
textile floor covering
EN 1307

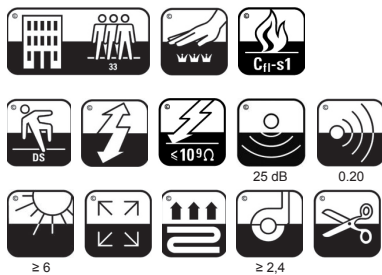

E432ADDD
www.pro-din.info




install with TacTiles®

Interface Europe Ltd reserve the right to change or modify specifications

www.interface.com



Mission Zero:
our promise to eliminate any negative impact our company may have on the environment by the year 2020.